


Servo drives CMMT-AS

FESTO

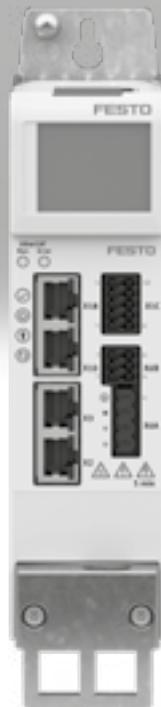

Key features

At a glance


- Universal servo drive for PM-synchronous servo motors up to 2500 W
- Supports the motor series EMMT-AS, EMME-AS and EMMS-AS, as well as third-party motors
- Integrated single-phase/three-phase mains connection 230/400 V AC, mains filter and braking resistor, connection option for external braking resistor
- Precise force, speed and position control
- Motion from point-to-point to interpolated motion
- Comprehensively integrated protective functions for the servo drive, motor and axis with automatic motor shut-down/quick stop
- Bus protocols



- Prepared device description files and function blocks for integration in PLC systems

- Configuration:
 - Automatically with the "Festo Automation Suite" as well as auto-tuning
 - Directly via fieldbus and PLC
 - Data backup concept via PLC or operating panel CDSB
- Supports digital absolute encoders (EnDat, Hiperface, Nikon-A) in the motor as well as incremental (A/B, Sin/Cos) displacement encoders on the axis
- Integrated safety functions:
 - Safe torque off (STO) up to SIL3/Cat. 4 PL e
 - Safe stop 1 (SS1) when using a suitable external safety relay unit and suitable circuitry for the servo drive
 - Safe brake control (SBC) up to SIL3/Cat. 3 PL e
 - Diagnostic outputs STA and SBA for feedback on the active safety function

The technology in detail

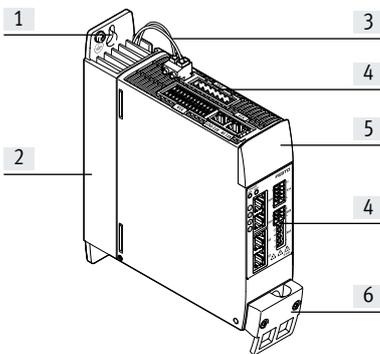

- [1] Elongated hole for mounting the servo drive on the control cabinet back wall
- [2] Cooling element for dissipating heat. The internal braking resistor is housed in the cooling element
- [3] Connection for braking resistor
- [4] Connections
- [5] Blind plate (optionally with plug-on operating panel CDSB → page 14)
- [6] Shield clamp and strain relief

Library for EPLAN

→ www.festo.de/eplan



EPLAN macros for fast and reliable planning of electrical projects in combination with servo drives, motors and cables. This enables a high level of planning reliability, standardisation of documentation, without the need to create symbols, graphics and master data.

PositioningDrives

Configuring electromechanical drives




Create the optimum drive package quickly and reliably. PositioningDrives calculates suitable combinations of electric axis, electric motor and servo drive using just a few application details. You can sort the results according to your specifications and obtain all the relevant data including the bill of materials and documentation for the selected combination. This avoids design errors and results in significantly improved energy efficiency for the system.

Key features


Festo Automation Suite

Parameterisation and programming software for electronic devices from Festo

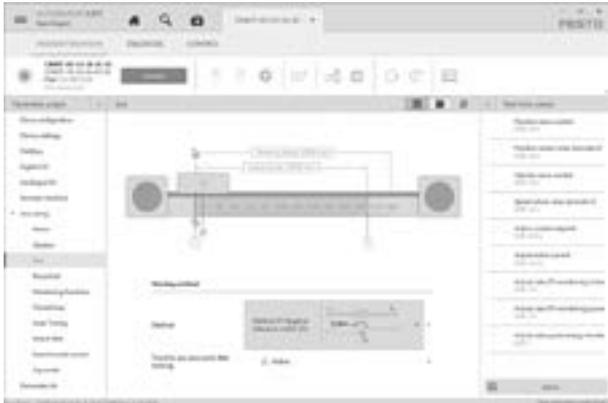

- Parameterisation, programming and commissioning in a clear and user-friendly interface
- Optimum support for complex processes thanks to guided wizards (e.g. for commissioning, drive configuration, etc.)
- Fast access to required documents and additional information
- Easy integration of electric drives in the controller programming

System overview

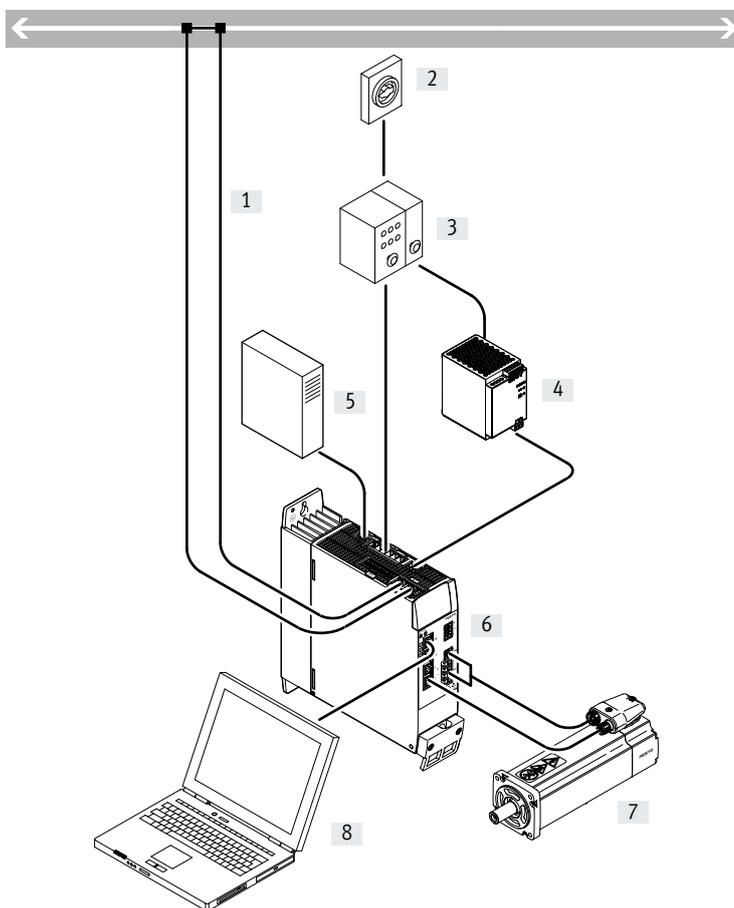

- [1] Bus/network
- [2] Main switch
- [3] Circuit breaker/fuses
- [4] Fixed power supply unit for logic voltage supply 24 V DC (PELV)
- [5] External braking resistor (optional)
- [6] Servo drive CMMT-AS
- [7] Servo motor
- [8] PC with Ethernet connection for parameterisation

Type codes

001	Series	
CMMT	Motor controller	

002	Motor type	
AS	AC synchronous	

003	Nominal current	
C2	2 A	
C3	3 A	
C4	4 A	
C5	5 A	

004	Nominal input voltage	
3A	230 V AC/50-60Hz	
11A	400 V AC	

005	Number of phases	
	Single-phase	
P3	Three-phase	

006	Bus protocol/activation	
EC	EtherCAT®	
EP	EtherNet/IP	
PN	Profinet	

007	Safety function	
S1	Standard safety	

Data sheet

Bus protocols

EtherCAT

PROFINET

EtherNet/IP



General technical data					
CMMT-AS-	C2-3A-...	C4-3A-...	C2-11A-...	C3-11A-...	C5-11A-...
Type of mounting	Mounting plate, screwed in				
Display	Green/yellow/red LED or operating panel CDSB with plain text message				
Controller operating mode	<ul style="list-style-type: none"> • Cascade controller • P position controller • PI speed controller • PI current regulator for F or M • Profile operation with record and direct mode • Interpolated mode via fieldbus • Homing/setup mode/auto-tuning 				
Operating mode	<ul style="list-style-type: none"> • Field-oriented control, position resolution 24-bit/rev. • Sampling rate 16 kHz • PWM with 8 or 16 kHz, vector modulation with 3rd harmonic • Real-time data acquisition: <ul style="list-style-type: none"> – 2x input position capture – 2x output position trigger – 2x position encoder input – 1x SYNC interface for encoder emulation or encoder input 				
Mounting position	Vertical				
Product weight [g]	1300	1400	2100	2100	2200

Bus protocols			
Interface	EtherCAT	PROFINET RT/IRT	EtherNet/IP
Function	Bus connection incoming/outgoing		
Process interface	Interpolated mode CSP	AC1: Adjustable-speed drives	Adjustable-speed drives
	Interpolated mode CSV	AC3: Drives with positioning function	Drives with positioning function
	Interpolated mode CST	AC4: Synchronous servo application	
	Point-to-point mode PP		
	Point-to-point mode PV		
	Point-to-point mode PT		
	Homing mode HM		
Record table with 128 entries			
Communication profile	CIA402	PROFIdrive	DriveProfile
	CoE (CANopen over EtherCAT)	PROFIenergy	
	EoE (Ethernet over EtherCAT)		
Max. fieldbus transmission rate [Mbps]	100		
Connection type	2 x socket		
Connection technology	RJ45		

Data sheet

Electrical data		C2-3A-...	C4-3A-...	C2-11A-...	C3-11A-...	C5-11A-...
Output connection data						
Output voltage range	[V AC]	3x (0 – Input)				
Nominal current per phase	[A _{eff}]	2	4	1.7	2.5	5
Peak current per phase	[A _{eff}]	6	12	5.1	7.5	15
Max. peak current duration (at fs ≥ 5 Hz)	[s]	2				
Nominal power	[W]	350	700	800	1200	2500
Peak power	[W]	1000	2000	2400	3600	7500
Output frequency	[Hz]	0 ... 599				
Max. motor cable length ¹⁾	[m]	25	50			
Load voltage AC						
Nominal operating voltage phases		Single-phase		Three-phase		
Input voltage range	[V AC]	100 –20% ... 230 +15%		200 –10% ... 480 +10%		
Nominal operating voltage	[V AC]	230		400		
Nominal current	[A _{eff}]	2.8	5.6	2	3	6
Peak current		8.4	16.8	6	9	18
Mains frequency	[Hz]	48 ... 62				
System voltage to EN 61800-5-1	[V]	300				
Max. short circuit current rating of the mains	[kA]	100				
Mains types of system earthing		TN, TT, IT				
Mains filter		Integrated				
Load voltage DC						
Input voltage range	[V DC]	80 ... 360		80 ... 700		
Max. DC link voltage	[V DC]	395		800		
Nominal current						
at 320 V DC	[A]	1.3	2.6	–	–	–
at 560 V DC	[A]	–	–	1.5	2.3	4.7
Logic supply						
Nominal voltage	[V DC]	24 ±20%				
Max. current consumption	[A]	0.5/2.3 ²⁾				0.5/2.7 ²⁾

- 1) Without external mains filter
 2) Max. current at full expansion, with two position encoders, brake output and all I/Os with max. specified loads connected

Braking resistor		C2-3A-...	C4-3A-...	C2-11A-...	C3-11A-...	C5-11A-...
Integrated						
Resistance	[Ω]	100		130		
Pulse power	[kW]	1.6		5		
Pulse energy	[Ws]	230		850		
Nominal power	[W]	23		48	48	58
External						
Resistance	[Ω]	100 ... 160	70 ... 100	130 ... 250	130 ... 250	80 ... 130
Max. continuous power	[W]	180	350	400	600	1200

Motor auxiliary connections		C2-3A-...	C4-3A-...	C2-11A-...	C3-11A-...	C5-11A-...
Motor temperature monitoring						
Digital		Connection for temperature switch (PTC, N/C contact or N/O contact)				
Analogue		Connection for analogue temperature sensor (KTY81 ... 84, NTC, Pt1000)				
Output for holding brake						
Version		High-side switch; 24 V; monitored internally				
Output current	[A]	0.8	0.8	1.0	1.0	1.3
Output for 2nd brake						
Version		High-side switch; 24 V; monitored internally				
Output current	[A]	0.1	0.1	0.1	0.1	0.1

Data sheet

Interfaces		
Ethernet		
Function	Parameterisation and commissioning	
Protocol	DHCP	
	FTP	
	TCP/IP	
Position encoder		
Function of position encoder 1	ENDAT 2.1 encoder	
	ENDAT 2.2 encoder	
	HIPERFACE encoder	
	Incremental encoder	
	SIN/COS encoder	
Function of position encoder 2	Nikon-A	
	Incremental encoder	
Synchronisation		
Function	Encoder emulation A/B/Z	
	Encoder input A/B/Z	
	Pulse/direction signals CLK/DIR	
	CW/CCW counting signals	
Encoder output, characteristics	1 MHz maximum output frequency	
	Resolution up to 16384 ppr	
Encoder input, characteristics	1 MHz maximum input frequency	
	Resolution up to 16384 ppr	
Input/output		
Digital inputs		
Number	10 ... 12 (depending on device design)	
Number of high-speed	2	
Time resolution of high-speed	[μ s]	1
Switching logic	PNP	
Properties	Not galvanically isolated	
	Freely configurable in some cases	
	Safety inputs in some cases	
Specification	Based on IEC 61131-2, type 3	
Working area	[V]	0 ... 30
Digital outputs		
Number	4 ... 6 (depending on device design)	
Number of high-speed	2	
Time resolution of high-speed	[μ s]	1
Switching logic	PNP	
Properties	Not galvanically isolated	
	Freely configurable in some cases	
Max. current	[mA]	20
Analogue setpoint inputs		
Number	1	
Properties	Differential input	
	Configurable for current/force, rotational speed and position	
Working area	[V]	± 10
Impedance	[k Ω]	70
Floating switching outputs		
Number	1	
Max. current	[mA]	50

Data sheet

Safety data		
Safety function to EN 61800-5-2		Safe torque off (STO)
		Safe stop 1 (SS1)
		Safe brake control (SBC)
Performance Level (PL) to EN ISO 13849-1		
Safe torque off (STO)		Category 4, Performance Level e
Safe brake control (SBC)		Category 3, Performance Level e
Safety integrity level (SIL) to EN 62061 and EN 61508		
Safe torque off (STO)		SIL 3/SILCL 3
Safe brake control (SBC)		SIL 3/SILCL 3
Certificate issuing authority and no.		German Technical Control Board (TÜV Rheinland) 0 1/20 5/5640.0 0/18
Proof test interval		
Safe torque off (STO)		Up to 20a
Safe brake control (SBC)		24 h
Diagnostic coverage	[%]	Up to 97
Safe failure fraction (SFF)	[%]	Up to 99
Hardware fault tolerance		1
Operating and environmental conditions		
Degree of protection		IP20
Ambient temperature ¹⁾	[°C]	0 ... +50
Storage temperature	[°C]	-25 ... +55
Relative humidity	[%]	5 ... 90 (non-condensing)
Protection class		I
Overvoltage category		III
Contamination level		2
Surge resistance	[kV]	6
Max. installation height ²⁾	[m]	2000
Shock and vibration resistance		To EN 61800-2 and EN 61800-5-1
CE marking (see declaration of conformity)		To EU EMC Directive ³⁾
		To EU Machinery Directive
		To EU Low Voltage Directive
		To EU RoHS Directive
Certification		c UL us listed (OL)
		RCM
Note on materials		Contains paint-wetting impairment substances
		RoHS-compliant

1) Above 40°C power is reduced by 3% per K.

2) Above 1000 m power is reduced by 1% per 100 m.

3) For information about the area of use, see the EC declaration of conformity at: www.festo.com/sp → Certificates.


If the devices are subject to usage restrictions in residential, commercial or light-industrial environments, further measures for the reduction of the emitted interference may be necessary.

Data sheet


View of servo drive

Front view

CMMT-AS-...-3A


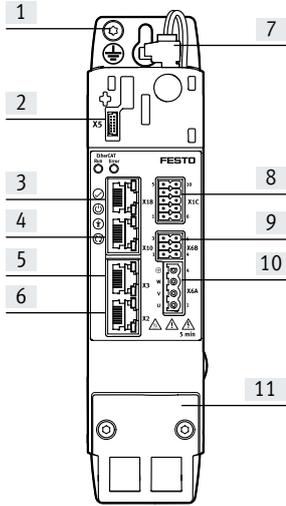


CMMT-AS-...-11A

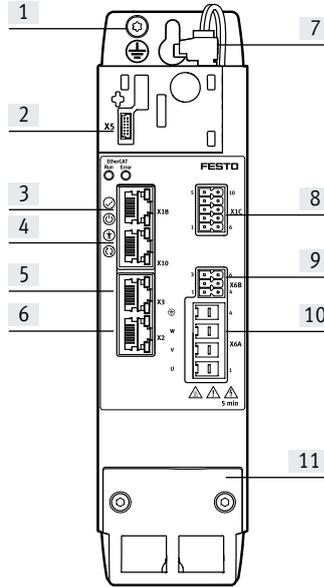

- [1] PE connection, housing
- [2] [X5] Connection for operating panel (behind blind plate)
- [3] [X18] Standard Ethernet
- [4] [X10] Device synchronisation
- [5] [X3] Position encoder 2
- [6] [X2] Position encoder 1
- [7] [X9B] Connection for braking resistor
- [8] [X1C] Inputs/outputs for the axis
- [9] [X6B] Motor auxiliary connection
- [10] [X6A] Motor phase connection
- [11] Shield clamp and strain relief


Top view

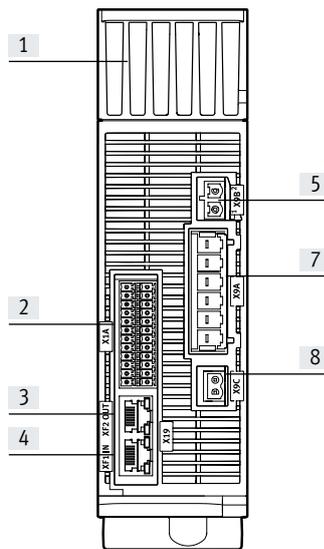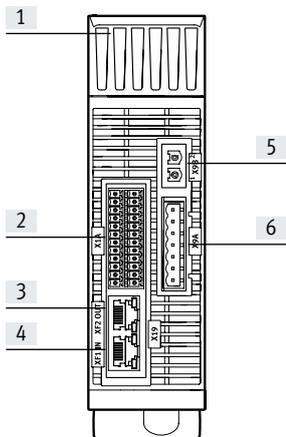

- [1] Cooling element
- [2] [X1A] I/O interface
- [3] [X2 OUT] RTE interface port 2
- [4] [X1 IN] RTE interface port 1
- [5] [X9B] Connection for braking resistor
- [6] [X9A] Supply: mains, DC link and logic voltage
- [7] [X9A] Supply: mains and DC link voltage
- [8] [X9C] Supply: logic voltage

Data sheet

Installation clearance for servo drive

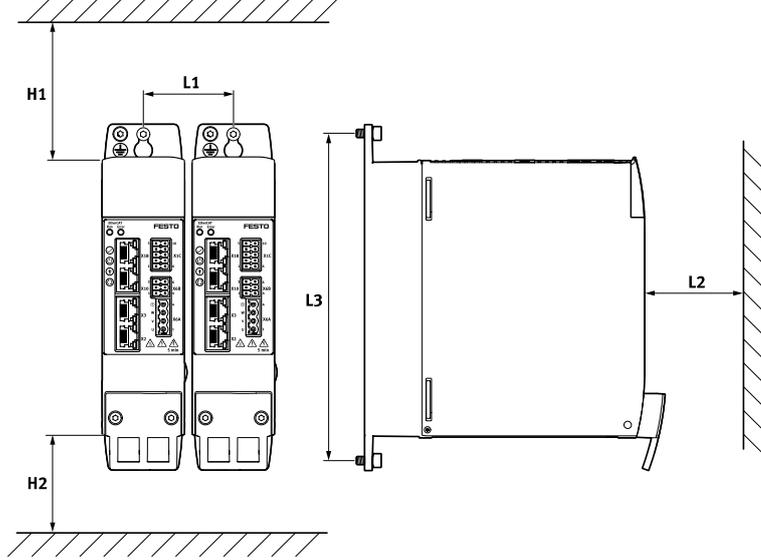


Type	H1	H2 ¹⁾	L1	L2	L3
CMMT-AS-...-3A	70	70	52	70	200
CMMT-AS-...-11A	100	70	62	70	230

1) An installation clearance of 150 mm underneath the servo drive is recommended for optimum wiring of the motor or encoder cable

Data sheet

Dimensions


Download CAD data → www.festo.com

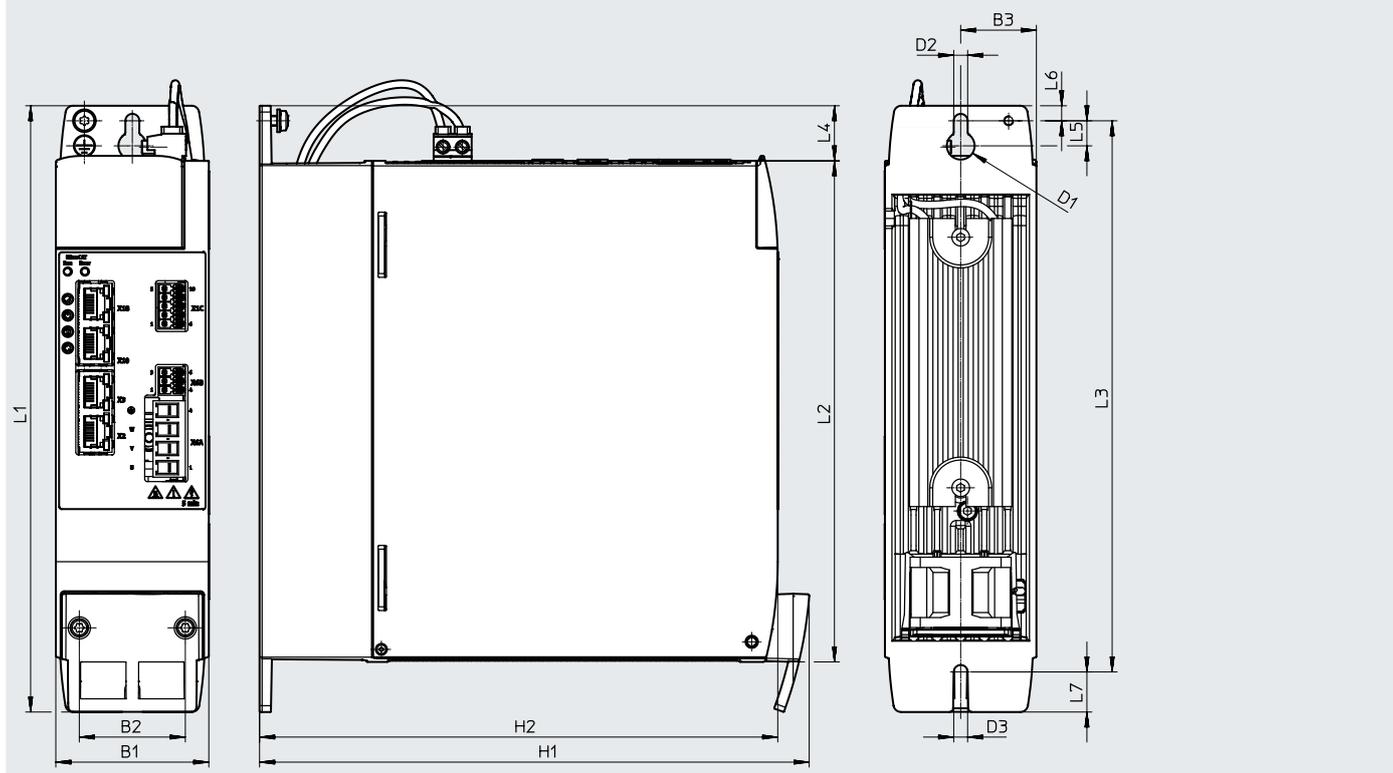

Type	B1	B2	B3	D1 ∅	D2	D3	H1	H2
CMMT-AS-...-3A	50	34	25	11	5.5	5.5	183	170
CMMT-AS-...-11A-P3	60	42	29.7	11	5.5	5.5	218	205

Type	L1	L2	L3	L4	L5	L6	L7
CMMT-AS-...-3A	212	170	200	22	10	6	9
CMMT-AS-...-11A-P3	242	200	220	22	10	6	16

Data sheet

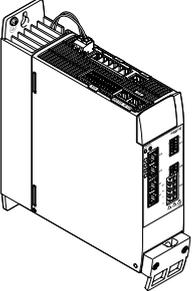
Ordering data	Description	Number of phases	Nominal current	Part no.	Type
	The assortment of plugs NEKM (→ page 14) is not included in the scope of delivery of the servo drive.	Bus protocol: EtherCAT			
		Single-phase	2	5340819	CMMT-AS-C2-3A-EC-S1
			4	5340820	CMMT-AS-C4-3A-EC-S1
		Three-phase	2	5340821	CMMT-AS-C2-11A-P3-EC-S1
			3	5340822	CMMT-AS-C3-11A-P3-EC-S1
			5	5340823	CMMT-AS-C5-11A-P3-EC-S1
		Bus protocol: PROFINET RT/IRT			
		Single-phase	2	5340814	CMMT-AS-C2-3A-PN-S1
			4	5340815	CMMT-AS-C4-3A-PN-S1
		Three-phase	2	5340816	CMMT-AS-C2-11A-P3-PN-S1
			3	5340817	CMMT-AS-C3-11A-P3-PN-S1
			5	5340818	CMMT-AS-C5-11A-P3-PN-S1
		Bus protocol: EtherNet/IP			
		1-phase	2	5340824	CMMT-AS-C2-3A-EP-S1
			4	5340825	CMMT-AS-C4-3A-EP-S1
		Three-phase	2	5340826	CMMT-AS-C2-11A-P3-EP-S1
			3	5340827	CMMT-AS-C3-11A-P3-EP-S1
			5	5340828	CMMT-AS-C5-11A-P3-EP-S1

Ordering data – Modular product system

Ordering table					
Series			Condi- tions	Code	Enter code
CMMT-AS-...	-3A	-11A			
Module no.	5111184	5111189			
Series	CMMT			CMMT	CMMT
Motor type	AC synchronous			-AS	-AS
Nominal current					
2 A				-C2	
3 A	–			-C3	
4 A		–		-C4	
5 A	–			-C5	
Nominal input voltage					
230 VAC/50-60 Hz		–		-3A	
400 VAC	–			-11A	
Number of phases					
Single-phase		–			
Three-phase	–			-P3	
Bus protocol/control	EtherCAT			-EC	
	PROFINET RT/IRT			-PN	
	EtherNet/IP			-EP	
Safety function	Standard safety			-S1	-S1

Accessories


Ordering data – Required accessories

	Description	Part no.	Type
Assortment of plugs			
	For single wiring connection with single-phase servo drives	4325822	NEKM-C6-C16-S
	For double wiring connection with single-phase servo drives	5054513	NEKM-C6-C16-D
	For single wiring connection with three-phase servo drives	5119205	NEKM-C6-C45-P3-S
	For double wiring connection with three-phase servo drives	5118001	NEKM-C6-C45-P3-D
	Not included in the scope of delivery of the servo drive.		

Ordering data – Optional accessories



Operating panel CDSB-A1

- Display of full-text messages. This means that errors, warnings and selected data can be read at a glance
 - Easy data backup of parameters and firmware in the unit for e.g. serial commissioning or device replacement
 - One operating panel can be used for several servo drives
 - Control element: touchscreen
 - Display: colour TFT
 - Display size: 1.77"
 - User memory: 3 GB
 - USB interface: USB 2.0 type mini
- Additional technical data:
 → Internet: cdsb


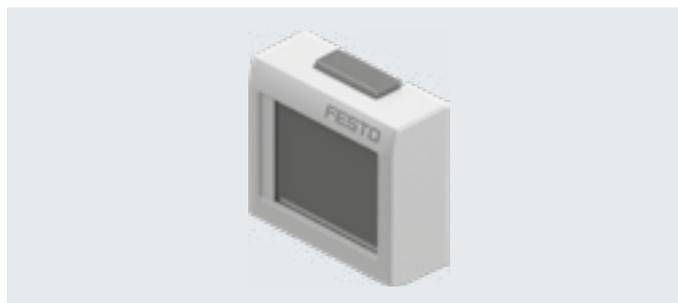



Ambient temperature [°C]	Storage temperature [°C]	Degree of protection	Weight [g]	Part no.	Type
0 ... 60	-20 ... +70	IP20	40	8070984	CDSB-A1
Not included in the scope of delivery of the servo drive					

Ordering data – Optional accessories

	Description	Part no.	Type
Connecting cable			
	<ul style="list-style-type: none"> • Patch cable for the daisy-chain connection of the bus interfaces X19A/B • Not included in the scope of delivery of the servo drive 	8082383	NEBC-R3G8-KS-0.2-N-S-R3G8-ET
Mains filter			
	Single-phase, 8 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A	8088928	CAMF-C6-F-C8-3A
	Single-phase, 20 A, sufficient for: 6x CMMT-AS-C2-3A or 3x CMMT-AS-C4-3A	8088929	CAMF-C6-F-C20-3A
	Three-phase, 16 A, sufficient for: 8x CMMT-AS-C2-11A or 5x CMMT-AS-C3-11A or 2x CMMT-AS-C5-11A	8096868	CAMF-C6-F-C16-11A
	Three-phase, 42 A, sufficient for: 21x CMMT-AS-C2-11A or 14x CMMT-AS-C3-11A or 7x CMMT-AS-C5-11A	8096894	CAMF-C6-F-C42-11A
	Not included in the scope of delivery of the servo drive		

Accessories

Ordering data – Optional accessories			
	Description	Part no.	Type
Flow control filter			
	Single-phase, 6 A, sufficient for: 2x CMMT-AS-C2-3A or 1x CMMT-AS-C4-3A	8088930	CAMF-C6-FD-C6-3A
	Three-phase, 6 A, sufficient for: 3x CMMT-AS-C2-11A or 2x CMMT-AS-C3-11A or 1x CMMT-AS-C5-11A	8096867	CAMF-C6-FD-C6-11A
Not included in the scope of delivery of the servo drive			

Ordering data – Optional accessories								Data sheets → Internet: cacr	
	For type CMMT-AS-					Resistance value [Ω]	Nominal power [W]	Part no.	Type
	C2-3A	C4-3A	C2-11A	C3-11A	C5-11A				
Braking resistor									
	-	■	-	-	-	72	200	1336611	CACR-LE2-72-W500
	■	■	-	-	■	100	200	1336615	CACR-LE2-100-W500
	-	-	■	■	-	240	200	8091543	CACR-LE2-240-W500
	-	-	■	■	-	240	720	8091544	CACR-KL2-240-W1800
	-	-	-	-	■	100	720	8091545	CACR-KL2-100-W1800
Not included in the scope of delivery of the servo drive									

Ordering data – Optional accessories					
	Description	For CMMT-AS-...		Part no.	Type
		-3A	-11A		
Blind plate					
	<ul style="list-style-type: none"> Used to cover the connections if no operating panel used Included in the scope of delivery of the servo drive 	■	■	5395254	CAFC-06-C
Shield clamp					
	<ul style="list-style-type: none"> For clamping the shield and strain relief for the motor cable Included in the scope of delivery of the servo drive 	■	-	5326867	CAMA-C6-SK-S2
		-	■	5335956	CAMA-C6-SK-S3