



Bray®

SERIES 32 / 33 Wafer
550mm - 900mm (22" - 36")
SERIES 35 / 36 Full Flanged
550mm - 1800mm (22" - 72")

BUTTERFLY VALVES LARGE DIAMETER / RESILIENT SEATED

FEATURES

500mm-1800mm (22"-72")

Bray Controls proudly offers this line of heavy duty, large diameter, resilient seated butterfly valves. The Series 32/33 valves are wafer versions with the Series 32 valve rated for 75 psi and the Series 33 designed for a higher rating of 150 psi. The Series 35/36 are full-flanged versions rated at 75 and 150 psi respectively. This valve series has many of the design features and benefits of the smaller Bray valves, such as

high C_v ratings, minimum parts exposed to the line media, greater reliability and a proven record of long service life.


Engineering innovation and exceptional quality are the focus of Bray's unique design features.

BODY (A) One piece wafer or full flanged style. All bodies are drilled to be compatible with ANSI 125/150 or other international flange standards. The Series 35/36 may be bolted to allow downstream flange removal or cross-bolted for maximum resistance to line stresses.

DISC (B) The high strength casting is spherically machined, hand polished to provide 360° concentric seating bi-directional bubble-tight shut off, minimum torque and longer seat life. The symmetrical disc profile enhances valve performance – the C_v values are higher, turbulence is reduced and pressure recovery is increased. The disc O.D. clearance is designed to work with all standard piping.

SEAT (C) One of the valve's key elements is Bray's unique *tongue and groove* seat design which fully isolates the body from line media. The Bray resilient seat offers lower torque than many valves on the market today, and is excellent for most vacuum services. The *tongue and groove* seat to body retention method is the most advanced design in the industry, making field replacement simple and fast. The strategically located molded-in O-ring completely eliminates the requirement of flange gaskets. The seat isolates the valve body and stem from line media and has been specifically designed to seal with slip-on or weld-neck flanges.

PRIMARY SEAL (D) The primary seal is achieved by preloaded contact of spherically machined hand polished disc hubs with unique molded seat flat surfaces. This sealing method isolates the flowing media from the stem and body material at all angles of valve disc seating.

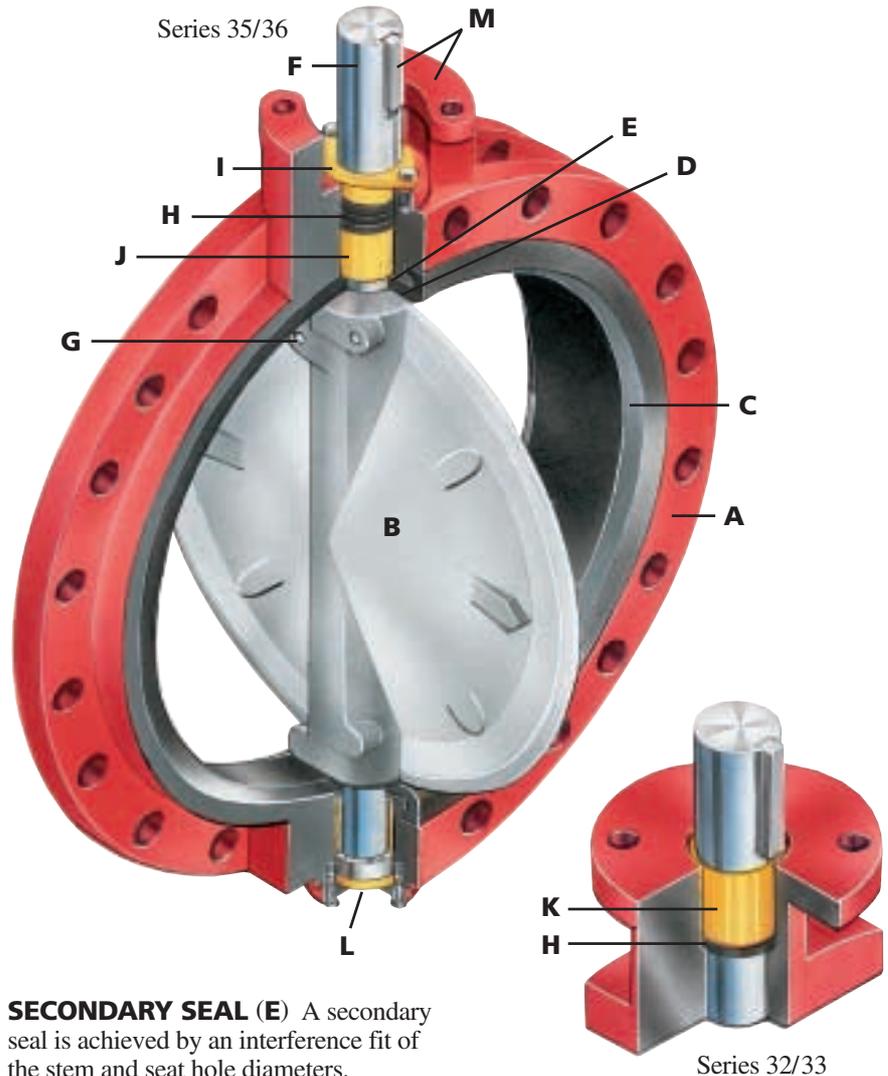

SECONDARY SEAL (E) A secondary seal is achieved by an interference fit of the stem and seat hole diameters.

STEM (F) Bray's one piece through stem design is completely isolated from the flowing media and achieves high torsional strength. The stem ends are standardized for direct mounting and interchangeability with Bray actuators.

TAPER PINS (G) Tangential taper pins of 17-4 PH stainless steel are driven and mechanically locked for maximum torsional capacity and resistance to vibration. O-rings are installed with the driven-in taper pins to insure bubble-tight shutoff under pressure or vacuum conditions.

STEM PACKING (H) This advanced V-Type packing design in the Series 35/36 is self-adjusting with bi-directional sealing which prevents external substances from entering the upper stem bore. This packing is externally adjustable and functions well for vacuum applications as well as a third pressure seal in emergency situations. The stem packing in the Series 32/33 is a V-cup self-adjusting design.

ADJUSTABLE PACKING GLAND (I) A bronze gland allows for field adjustment of stem packing without removing manual operators or power actuators. (Series 35/36 only)

STEM BEARING (J) To minimize bearing friction and operating torque, heavy wall bronze sleeve bearings are utilized. (Series 35/36 only)

STEM BUSHING (K) Heavy wall bronze bushing absorbs actuator side thrusts. (Series 32/33 only)

VERTICAL THRUST BEARING (L) A bronze vertical thrust bearing eliminates disc displacement due to the weight of the stem and disc.

ACTUATOR MOUNTING FLANGE AND STEM CONNECTION (M) Due to a modular concept of design, all Bray manual gear operators and pneumatic or electric actuators mount directly to Bray valves.

SPECIFICATIONS

RECOMMENDED SPECIFICATIONS FOR BRAY SERIES 32/33, 35/36 SHALL BE:

- Wafer or double flanged bodies.
- Tongue-and-groove seat design with primary hub seal and a molded O-ring suitable for weld-neck and slip-on flanges.
- No field adjustments necessary to maintain optimum field performance.
- Seat totally encapsulates the body with no flange gaskets required.
- Spherically machined, hand polished disc edge and hub for minimum torque and maximum sealing capability.
- Equipped with non-corrosive bushing and self-adjusting stem seals for pressure or vacuum on wafer valves.
- On flanged valves, equipped with packing glands and upper/lower bronze bearings. The packing gland to be adjustable without removing manual operator or actuator.

removing manual operator or actuator.

- Bi-directional and tested to 110% of full pressure rating.
- Disc stem connected by 17-4 PH tangential taper pins driven, O-ring sealed, and mechanically locked.

MATERIALS SELECTION

550mm-1800mm (22"-72")

BODY:

- Cast Iron ASTM A126 Class B
- Ductile Iron ASTM A536 Gr. 65-45-12
- Cast Steel ASTM A216 Gr. WCB
- 316 Stainless Steel ASTM A351 CF8M

DISC:

- Cast Iron ASTM A126 Class B
- Nylon 11 Coated, Cast Iron ASTM A126 Class B
- ENP Cast Iron ASTM A126 Class B
- Ductile Iron ASTM A536 Gr. 65-45-12
- Nylon 11 Coated, Ductile Iron ASTM A536
- Aluminum Bronze ASTM B148 Alloy C95400
- 316 Stainless Steel ASTM A351 CF8M
- Monel® ASTM A494 Grade M-35-1
- Hastelloy® C-276 ASTM B575 Alloy N10276

SEAT: • EPDM • Buna-N • FKM*

STEM:

- Carbon Steel, Coated
- 304 Stainless Steel ASTM A276 Type 304
- Monel® ASTM B164 Alloy UNS04400
- Hastelloy® C-276 ASTM B575 Alloy N10276

TAPER PINS:

17-4 PH Stainless Steel ASTM A564 Type 630 Cond. H900

PACKING: Buna-N

BEARINGS: Luberized Bronze (Series 35/36)

BUSHING: Luberized Bronze (Series 32/33)

THRUST BEARING: Bronze

Additional materials are available, please consult your Bray representative.

C_v VALUES-VALVE SIZING COEFFICIENT BRAY SERIES 32/33, 35/36

Valve Size		Disc Position (degrees)								
mm	ins	90°	80°	70°	60°	50°	40°	30°	20°	10°
550	22	27,168	22,028	14,562	9,036	5,640	3,510	2,070	916	103
600	24	33,154	27,186	18,235	11,040	6,962	4,244	2,387	1,028	259
650	26	36,220	29,700	19,921	12,496	7,824	4,890	2,752	1,141	289
700	28	41,619	34,683	22,578	13,838	8,636	5,399	3,133	1,324	295
750	30	52,443	43,003	28,844	18,090	11,328	7,080	3,986	1,652	420
800	32	60,658	48,558	32,591	20,410	12,743	7,983	4,636	2,026	550
850	34	68,374	55,438	36,648	22,741	14,194	8,834	5,210	2,304	533
900	36	77,089	59,667	40,086	25,053	15,572	9,790	5,936	2,775	740
1000	40	90,175	73,990	50,406	30,636	19,307	11,862	6,925	2,971	757
1050	42	102,989	83,421	54,584	35,016	21,010	12,997	7,879	3,502	783
1100	44	112,960	87,430	58,740	36,712	22,818	14,346	8,698	4,066	904
1150	46	122,560	99,372	65,692	40,763	25,443	15,835	9,339	4,130	956
1200	48	132,888	108,968	70,431	43,853	27,242	17,010	10,365	4,651	1,023
1400	54	168,700	138,334	89,411	55,671	34,583	21,594	13,158	5,904	1,299
1500	60	190,000	154,000	102,000	63,200	39,400	24,500	14,500	6,400	1,480
1650	66	211,000	171,000	113,000	70,200	43,800	27,300	16,100	7,110	1,650
1800	72	244,000	198,000	131,000	81,200	50,700	31,500	18,600	8,220	1,900

PRESSURE RATINGS

For bi-directional bubble-tight shut off, disc in closed position:

- Series 32 : 550mm-900mm 75 psig
- Series 33 : 550mm-900mm 150 psig
- Series 35 : 550mm-1800mm 75 psig
- Series 36 : 550mm-1800mm 150 psig

All valves are factory tested to 110% of their specified pressure rating.

COMPONENTS


Item No.	Qty.		Item Description
	S. 32/33	S. 35/36	
1	1	1	Body
2	1	1	Seat
3	1	1	Disc
4	1	1	Stem
5	1	1	Bottom Plate
6	1	1	Packing
7	-	2	Bearing
8	2	2	Taper Pin
9	2	2	O-ring
10	2	2	Nut
11	2	2	Lock Washer
12	1	1	Thrust Bearing
13	1	1	Gasket
14	4	6	Screw
15	1	1	Key
16	-	1	Packing Gland
17	1	1	Retainer
18	1	-	Bushing

TEMPERATURE RANGE OF SEATS

Type	Max	Min
EPDM	121°C (+250°F)	-40°C (-40°F)
Buna-N	100°C (+212°F)	-18°C (0°F)
FKM*	204°C (+400°F)	-18°C (0°F)

For other seat types consult factory.

NOTE: For Seating/Unseating and Dynamic Torque data, please consult your Bray representative.

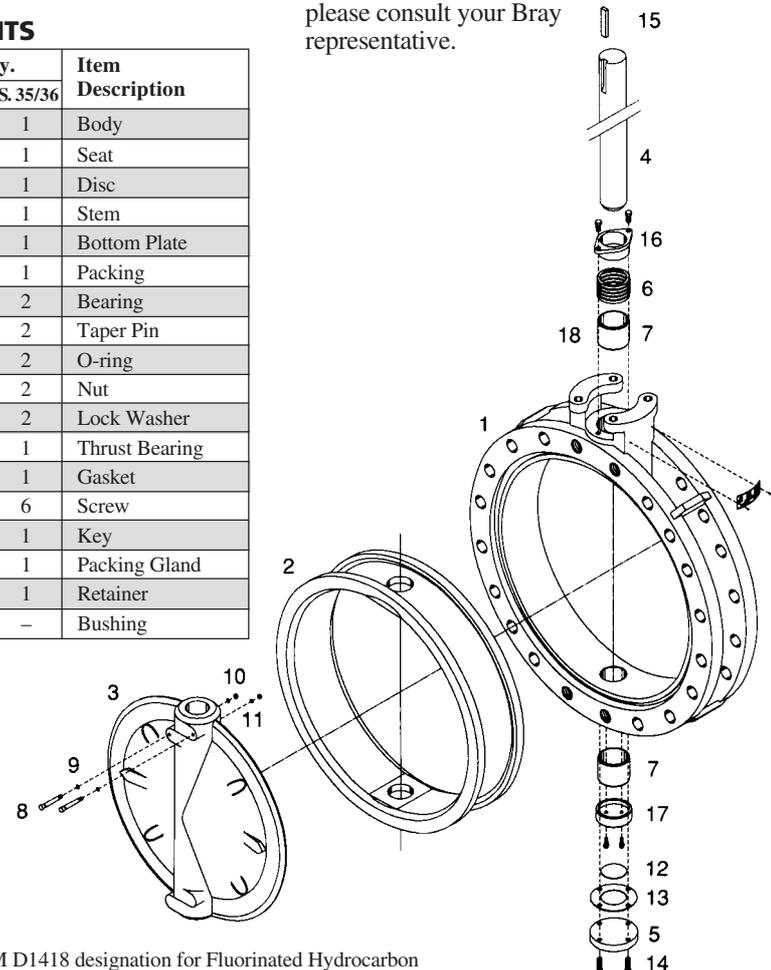

*FKM is the ASTM D1418 designation for Fluorinated Hydrocarbon Elastomers (also called Fluoroelastomers).

Hastelloy® is a registered trademark of Haynes International, Inc.

Monel® is a registered trademark of The International Nickel Company, Inc.

SERIES 32/33 Wafer*

Valve Size		A	B	C	D	E	F	Mounting Flange Drig.			G	SERIES 32				SERIES 33				L	Weight (kgs)
mm	ins							PCD	NO. HOLES	HOLE DIA.		H	J	KEY SIZE	K	H	J	KEY SIZE	K		
550	22	648	154	540	611	511	210	165	4	22	63.5	63.5	101.6	18x11	521	63.5	101.6	18x11	522	419	182
600	24	710	151	591	654	495	210	165	4	22	63.5	63.5	101.6	18x11	575	63.5	101.6	18x11	576	446	191
650	26	749	165	621	707	554	300	254	8	17.5	63.5	63.5	101.6	18x11	601	63.5	101.6	18x11	602	478	245
700	28	790	165	672	756	580	300	254	8	17.5	63.5	63.5	101.6	18x11	654	63.5	101.6	18x11	655	502	264
750	30	868	167	744	813	584	210	165	4	22	76.2	63.5	101.6	18x11	728	76.2	101.6	20x12	730	529	300
800	32	903	190	772	856	670	300	254	8	17.5	76.2	63.5	101.6	18x11	751	76.2	101.6	20x12	752	556	357
850	34†	984	200	838	908	684	350	298	8	22	88.9	76.2	101.6	20x12	817	88.9	133.4	22x14	818	599	411
900	36	1034	200	899	972	705	273	216	8	17.5	88.9	76.2	101.6	20x12	877	88.9	133.4	22x14	879	633	466

*Dimensions for the Series 33 valve are the same except for a larger Key Size, H, J and K dimension.


SERIES 35/36 Double Flanged*

Valve Size		A	B	C	D	E	F	Mounting Flange Drig.			G	SERIES 35				SERIES 36				L	Weight (kgs)	
mm	ins							PCD	NO. HOLES	HOLE DIA.		H	J	KEY SIZE	K	H	J	KEY SIZE	K			
550	22	749	154	540	611	511	210	165	4	21	63.5	63.5	102	—	521	63.5	102	—	522.2	419	216	
600	24	838	151	591	654	495	210	165	4	21	63.5	63.5	102	18x11	575.1	63.5	102	18x11	576.3	446	227	
650	26	895	165	621	707	554	300	254	8	18	63.5	63.5	102	—	601.2	63.5	102	—	602.2	478	307	
700	28	960	165	672	756	580	300	254	8	18	63.5	63.5	102	18x11	653.8	63.5	102	18x11	654.8	502	334	
750	30	984	167	744	813	584	210	165	4	21	76.2	63.5	102	18x11	728.2	76.2	102	20x12	729.7	529	389	
800	32	1060	190	772	856	670	300	254	8	18	76.2	63.5	102	18x11	751.1	76.2	102	20x12	752.1	556	459	
850	34	1135	200	838	908	684	350	298	8	21	88.9	76.2	102	—	817.4	88.9	102	—	818.4	599	530	
900	36	1168	200	897	972	705	241	216	4	31.75	88.9	76.2	102	20x12	877.3	88.9	102	22x14	878.8	633	600	
1000	40	1289	216	975	1056	782	350	298	8	21	101.6	88.9	133	22x14	953.5	101.6	133	28x16	952.2	675	973	
1050	42	1346	251	1048	1124	813	241	216	4	31.75	101.6	88.9	133	22x14	1021.1	101.6	133	28x16	1022.4	706	1159	
1100	44	1403	251	1099	1175	841	350	298	8	21	101.6	88.9	133	—	1071.9	101.6	133	—	1073.2	738	1273	
1150	46†	1454	276	1149	1235	886	350	298	8	21	127	101.6	133	—	1119.6	—	—	—	—	762	1398	
1150	46†	1454	276	1149	1235	886	415	356	8	33	127	—	—	—	—	127	152	—	—	1120.6	762	1398
1200	48	1511	276	1200	1286	914	273	216	4	31.75	127	101.6	133	28x16	1171.7	127	152	32x18	1173.0	789	1455	
1400	54	1753	390	1375	1461	1032	350	298	8	21	152.4	127	133	—	1317.8	—	—	—	—	945	2727	
1400	54	1753	390	1375	1461	1032	415	356	8	33	152.4	—	—	—	—	152.4	165	—	—	1317.8	945	2727
1500	60	1854	381	1505	1623	1083	415	356	8	33	177.8	152.4	165	—	1460.8	—	—	—	—	1038	3182	
1500	60	1854	381	1505	1623	1083	475	406	8	40	177.8	—	—	—	—	177.8	165	—	—	1462.0	1038	3182
1650	66	2032	457	1655	1775	1235	415	356	8	33	177.8	152.4	165	—	1597.9	—	—	—	—	1132	3636	
1650	66	2032	457	1655	1775	1235	475	406	8	40	177.8	—	—	—	—	177.8	165	—	—	1599.7	1132	3636
1800	72	2197	457	1759	1873	1327	475	406	8	40	215.9	190.5	203	—	1702.6	—	—	—	—	1205	5114	
1800	72	2197	457	1759	1873	1327	560	483	12	40	215.9	—	—	—	—	215.9	254	—	—	1703.8	1205	5114


*Dimensions for the Series 36 valve are the same except for a larger Key Size, H, J and K dimension. Dimensions for 1150mm and 1400mm-1800mm Series 35 and Series 36 valves differ and are listed separately.

† Dimensions are for reference only. Consult factory for exact dimensions. Bray reserves the right to change product dimensions without notice.

SERIES 32/33

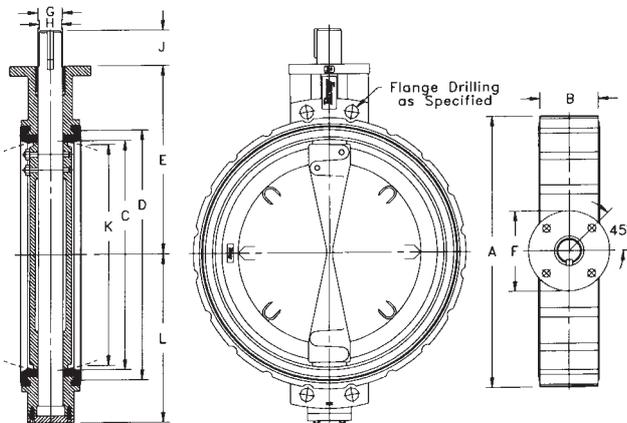

SERIES 35/36

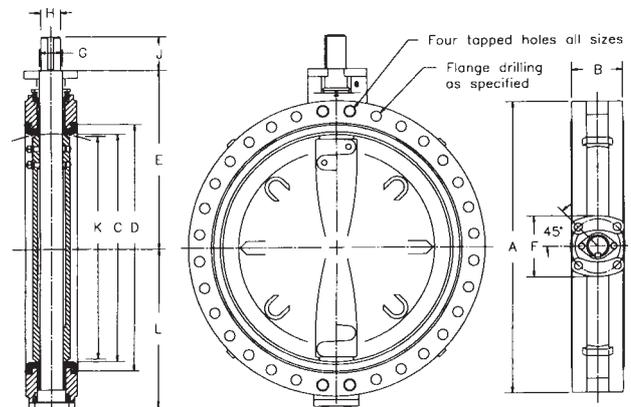

All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved.

Patents applied for in U.S. and foreign countries.



A Subsidiary of BRAY INTERNATIONAL, Inc.

16-18 Fountain Crescent, Inchinnan Business Park
Inchinnan PA4 9RE Scotland

Tel: +44(0)141 812 5199 Fax: +44(0)141 812 6199 www.bray.com

© 2004 Bray International. All rights reserved.

B-1013 8/04