

DIAPHRAGM SENSING PRESSURE SUSTAINING VALVE PS30SS DN 1/2" – 2"; DN15 – DN50

DESCRIPTION

The ADCA PS30 series **direct acting, spring-loaded diaphragm sensing**, pressure sustaining valves, are designed for use on compressed air, water and other gases or liquids compatible with the materials of the construction.

They are suitable for pressure sustaining applications where low capacity is required.

In general this valve maintains the upstream pressure under control.

Connections are female screwed or flanged.

MAIN FEATURES

Compact design.

Machined from barstock materials or investment casting.



OPTIONS: Different soft valves for water and gases.
1/4" gauge connection on body.
Regulating screw with top cap.

USE: Compressed air, water and other gases and liquids compatible with the construction.

AVAILABLE MODELS: PS30/SS – Stainless steel.

SIZES: DN 1/2" to DN 2"
DN 15 to DN 50

CONNECTIONS: Female screwed ISO7/1Rp(BS 21) or NPT.
Flanged EN 1092-1 PN40-PN63.
Special flanges upon request.

INSTALLATION: Horizontal installation.
An "Y" strainer should be provided upstream the valve.
See IMI, installation and maintenance instructions.

ORDER REQUIREMENTS : Type of fluid
Maximum operating temperature
Required opening pressure
Capacity (maximum and minimum).

Size shown: DN 1/2"

CAPACITIES						
Valve Size	15	20	25	32	40	50
KVs (m3/h)	2,1	2,4	6,5	7,2	12,7	13,7


LIMITING CONDITIONS	
Valve model	PS30SS
Body design conditions	PN 63
Max.upstream pressure	15 bar
Min.upstream pressure	0,2 bar
Max.design temperature *	80 °C

*Other on request.

CE MARKING (PED-European Directive 97/23/EC)	
PN 16-PN63	Category
DN 15 to 20	SEP - art. 3, paragraph3
DN 25 to 32	SEP - art. 3, paragraph3
DN 40 to 50	1 (CE Marked)

DIMENSIONS (mm)-Screwed					EN 1092-1 Flanges		
SIZE DN	A	B	C	WGT. Kgs	D*	E	WGT. Kgs
1/2"-15	80	38	142	1,8	150	47,5	3,2
3/4"-20	80	38	142	1,8	150	52,5	3,8
1" - 25	125	66	285	5,7	260	57,5	8,3
1 1/4"-32	125	66	285	5,7	260	70	8,6
1 1/2"-40	195	90	270	13	200	75	17,8
2" - 50	205	90	270	13,4	230	82,5	18,5

* Different lengths on request.

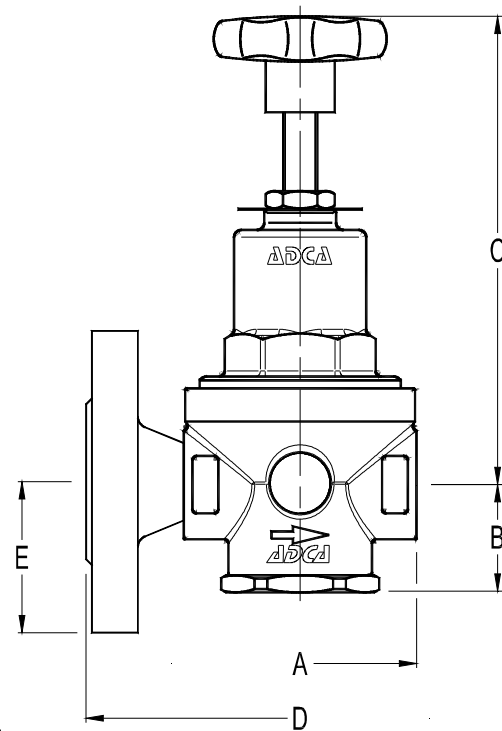

Size shown: DN 1/2"

MATERIALS		
POS.	DESIGNATION	MATERIAL
1	VALVE BODY	AISI316 / 1.4401 ; CF8M / 1.4408
2	TOP COVER	AISI316 / 1.4401 ; CF8M / 1.4408
3	SEAT COVER	AISI316 / 1.4401 ; CF8M / 1.4408
4	* O-RING	NBR
5	VALVE SEAT	AISI316 / 1.4401
6	SEALING	NBR
7	* O-RING	NBR-EPDM-PTFE,etc
9	VALVE PLUG	AISI316 / 1.4401
10	* DIAPHRAGM	PTFE
11	* DIAPHRAGM	**NBR
12	GASKET	**RUBBER
13	SPRING PLATE	AISI304 / 1.4301
14	NUT	ST.STEEL A2-70
15	* ADJUSTMENT SPRING	SPRING STEEL
16	TOP SPRING PLATE	BRASS
17	ADJUSTMENT SCREW	AISI304 / 1.4301
18	LOCKNUT	ST.STEEL A2-70
19	HANDWHEEL	PLASTIC
20	SPRING IDENT. PLATE	ALUMINIUM

* Available spare parts. ** Stainless steel on request .

Remarks: All valves has a serial number. In case of non-standard valves this number must be supplied if spare parts are ordered.

