

L&M VALVE FIGURE M345 REPLACEABLE POLYMER LINER KNIFE GATE VALVE

DN 50 - 1500

The unique M345 series valve products with the three-piece replaceable polymer liner offer reliability and long life in a wide variety of tough applications



FEATURES

- 300, 600, 900 psi (21, 41, 62 bar) or higher CWP design.
- Proven design features a three-piece replaceable polymer liner.
- Superior shut-off; not to exceed 20 cc water per inch of diameter per minute at 40 psi (2.8 bar), half of MSS.
- Available with ASME Class V shut-off in select applications.
- Every valve is tested for shut-off in both directions.
- Can be installed without worry as to direction of flow.
- 100% full port opening reduces pressure drop allowing greater flow and minimizing wear.
- T-Lock insert is firmly retained by the body liner, helping ensure maximum performance.
- Liner provides all-around gate support and helps prevent lateral movement of the gate, giving you longer packing life and a more consistent valve seal.
- Positive seal packing chamber.

Designed for and proven in some of the most difficult applications, the M345 offers superior shut-off, flow and reliability compared to other knife gate valves. Additionally, it performs very well in many services not normally considered to be typical knife gate applications.

FULL RANGE OF OPERATORS AND ACCESSORIES ARE AVAILABLE

- Handwheel (standard)
- Bevel gear (recommended 10" [DN 250] and above)
- Lock-Pin for open, closed or both
- Air/hydraulic/spring cylinders
- Electric motor operators
- Control accessories
- Extension stems, floor stands, stem guides

GENERAL APPLICATION

Designed to provide superior performance in a wide variety of industries and applications:

- Pulp and paper
- Mining
- Power
- Wastewater
- Chemical
- Food and beverage
- Powder and bulk

TECHNICAL DATA

Size range:	DN 50 - 1500
M345 (300):	300 psi (21 bar) CWP at ambient temperature
M345 (600):	600 psi (41 bar) CWP at ambient temperature
M345 (900):	900 psi (62 bar) CWP at ambient temperature
	Flanges drilled and tapped to ASME B16.5/300 or as required

NOTES:

Stated leak rates apply to standard polymer lined versions only.

L&M VALVE FIGURE M345 REPLACEABLE POLYMER LINER KNIFE GATE VALVE

DN 50 - 1500

THREE-PIECE FIELD REPLACEABLE LINER ASSEMBLY

The three-piece liner of the M345 Series acts as the valve seat, gate support and packing support, providing you with excellent performance. The close tolerance fit of the valve liner, along with the line pressure, is designed to deliver a tight shut-off. The liner also provides all-around gate support, resulting in longer packing life and a consistent valve seal.


Each liner is precision cut, placed into the valve frame and bonded with a silicone compound to help ensure perfect alignment and a superior seal. Liners are available in different materials to suit many applications.

UHMWPE - 180°F (82°C), Ultra-high-molecular-weight polyethylene (UHMWPE) has excellent chemical, abrasion and impact resistant properties with a good temperature range. It is widely used in the pulp and paper, textile, packaging and mining industries.

Polypropylene - 225°F (107°C), A thermoplastic polymer with good impact and fatigue properties. It is resistant to acids, alkalis and solvents.

PTFE - 350°F (177°C), A polytetrafluoroethylene plastic with superior chemical resistant properties at elevated temperatures. It has excellent anti-stick properties, however, it has a relatively poor resistance to wear and is not recommended for abrasive applications.

Other custom liners are available for special and unique applications. Contact your sales representative for additional information.

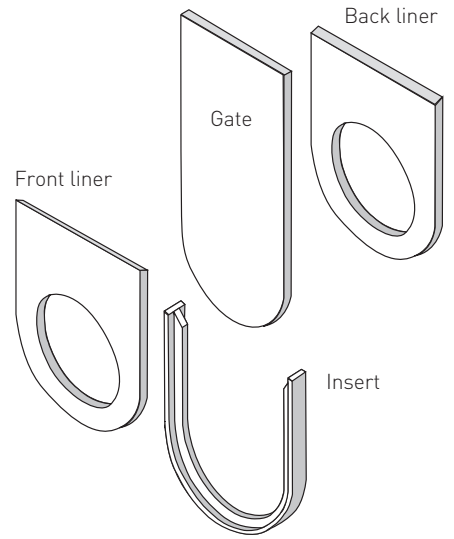

AVAILABLE M345 INSERT STYLES

The M345 was designed for the demanding requirements found in many industrial applications. The standard M345 features a T-Lock Insert that retains the perimeter section of the liner to the outer sides. This helps ensure maximum liner and seat performance in heavy solids.

Also available is the ZP configuration, with a reinforced elastomer insert that acts as the insert section which is built to match the valve port ID, providing an uninterrupted, straight through flow that reduces turbulence. This helps deliver maximum liner and seat performance in heavy solids.

To enhance performance, the M345 can be provided with special fixed or replaceable retaining rings that help deliver long life in abrasive applications:


- Tungsten Carbide Coated
- Hard surface overlay
- UHMWPE, and others

SPECIAL ALLOYS AND CONFIGURATIONS


The L&M M345 can be provided with high grade alloy gates and rings such as titanium, Hastelloy®, Alloy 20, etc. for aggressive applications. Combine this with a PTFE liner, and you have a very effective high performance knife gate valve.

The M345 can also be built in square or rectangular designs specific to your dimensions and applications.

STANDARD T-LOCK SEAT DESIGN

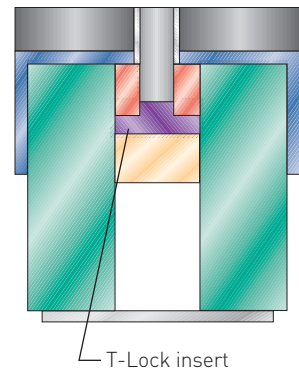


OPTIONAL ZP ZERO POCKET DESIGN

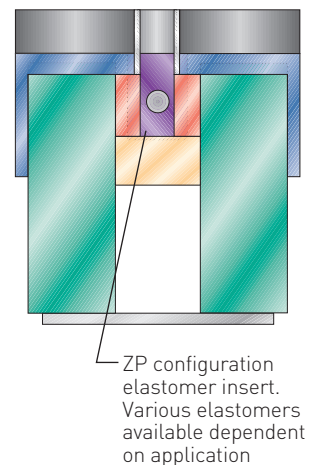

L&M VALVE FIGURE M345 REPLACEABLE POLYMER LINER KNIFE GATE VALVE

DN 50 - 1500

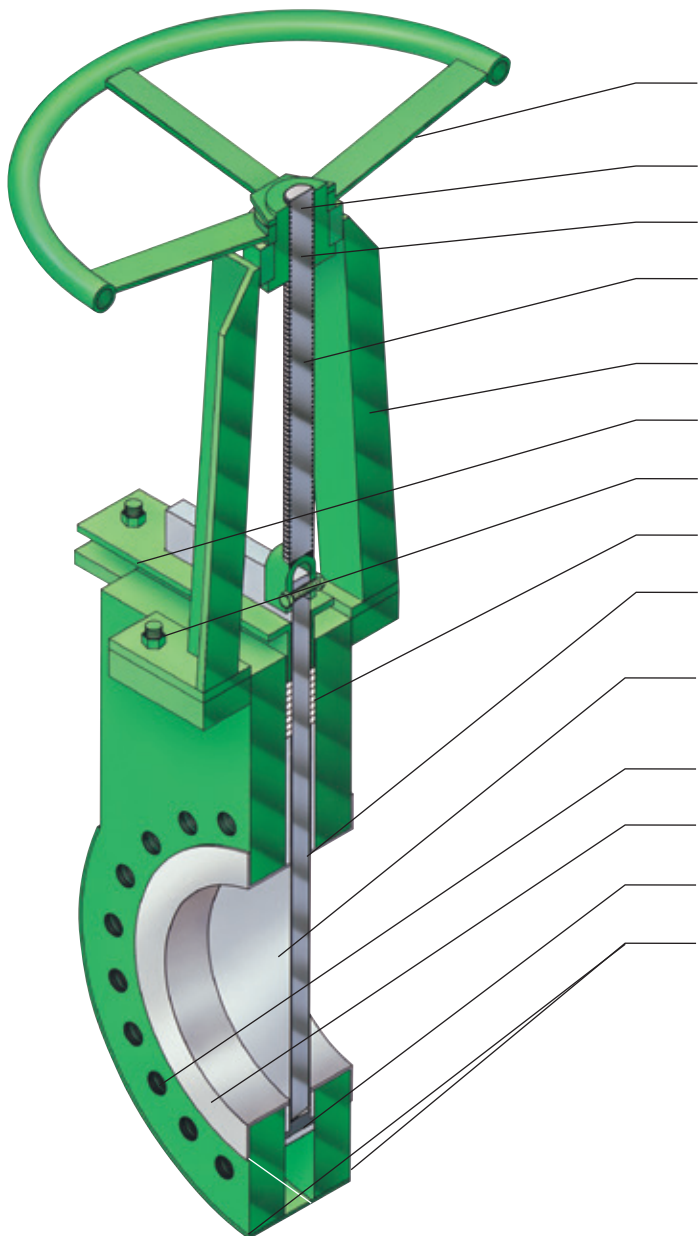

FEATURES

- Cast ductile iron handwheel (bevel gear recommended for sizes 10" (DN 250) and larger)
- Self-locking handwheel retaining nut
- Acid-resistant bronze stem nut smooth operation
- Heavy cross-section 304 stainless steel stem, single-lead ACME threads for ease of operation
- Heavy fabricated yoke from channel or T-Bar
- Heavy reinforced packing gland
- Locknuts used on all bolting
- Multiple rows of packing
- Three-piece field replaceable polymer liner, available in UHMWPE, PTFE and Polypropylene, supports gate on all sides
- Gate finished ground on both sides for superior bi-directional shutoff and minimum rim-pull
- Flanges drilled and tapped to ASME B16.5/300
- Stainless steel retaining rings/raised face
- Full port flow area to 24" (DN 600)
- Fabricated steel body provides superior strength

The rugged construction of the M345 helps set the standard for a true, heavy duty, high performance knife gate valve.

SPECIFICATION


Bonnetless, universal knife gate valve, 300, 600 and 900 psi (21, 41 and 62 bar) design for 300, 600 and 900 psi (21, 41 and 62 bar) CWP, wafer type with bi-directional shut-off up to the full rated pressure of 300, 600 and 900 psi (21, 41 and 62 bar) CWP. Valve shall have a maximum leakage rate of no more than 20 cc per inch of diameter per minute at 40 psi (2.8 bar) in both directions without the use of O-rings, guides or wedges obstructing the port. The liner shall be made from a polymer material suitable for the application and field replaceable. Typically made from three-separate pieces; the front, back and T-Lock insert, the liner shall line the interior of the valve body, supporting the gate.

The liner insert is to be "T" shaped to accommodate the front and back liner pieces, helping prevent insert pullout in severe applications. To deter atmospheric leakage, the valve features an adjustable packing assembly consisting of multiple layers of braided packing around gate, evenly compressed by a one-piece packing gland. The valve is to have 100% full port flow area with no guides or wedges obstructing the port. The gate shall be finished ground on both sides made from stainless steel (or as required for application).

The body material shall be fabricated carbon steel or 316 S/S depending on application needs, drilled and tapped to ASME B16.5/300 or as required. Valve is equipped with a manual handwheel operator assembly featuring a cast ductile iron handwheel, a heavy duty foot mounted yoke with an acid resistant bronze stem nut, including a 304 stainless steel rising stem. Specify the L&M valve model M345 from your sales representative.

L&M VALVE FIGURE M345 REPLACEABLE POLYMER LINER KNIFE GATE VALVE

DN 50 - 1500

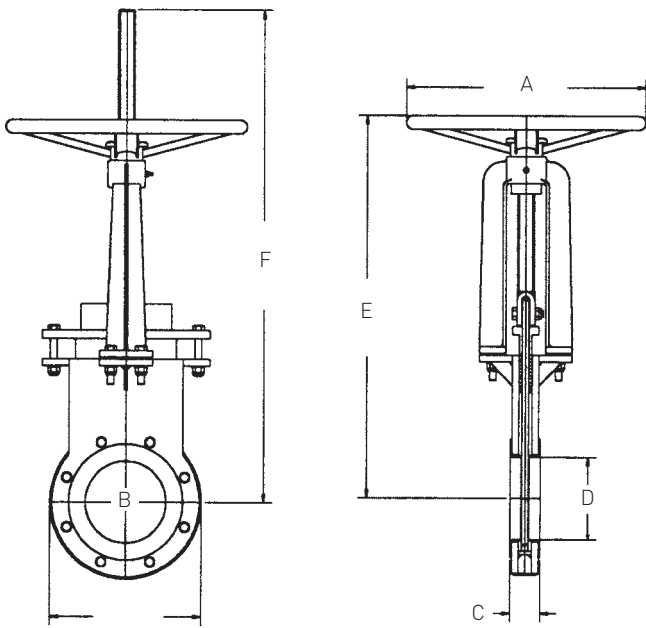

DIMENSIONS (in) AND WEIGHT (lbs)

Valve size NPS	A	B	C	D	E	F	Weight
2	12	6¾	2¼	2	18⅞	20¾	60
3	12	8½	2¼	3	21	24	70
4	12	10¼	2¼	4	23⅞	27¼	75
5	18	11¼	2¼	5	26⅞	31¾	100
6	18	12¾	2½	6	29⅞	41⅞	120
8	18	15¼	3	8	33¾	48⅞	185
10	24	17¾	3	10	38¾	45¼	250
12	24	20¾	3¼	12	49⅞	54	425
14	24	23¼	3¼	14	54⅞	60⅞	535
16	24	25¾	3¾	16	59	67½	710
18	24	28¼	4	18	65¼	76	870

DIMENSIONS (mm) AND WEIGHT (kg)

Valve size DN	A	B	C	D	E	F	Weight
50	305	171.5	57.2	50.8	479.4	527.1	27.2
80	305	215.9	57.2	76.2	533.4	609.6	31.8
100	305	260.4	57.2	101.6	587.4	692.2	34.0
125	457	285.8	57.2	127.0	682.6	806.5	45.4
150	457	323.9	63.5	152.4	752.5	1063.6	54.4
200	457	387.4	76.2	203.2	857.3	1228.7	83.9
250	610	450.9	76.2	254.0	984.3	1149.4	113.4
300	610	527.1	82.6	304.8	1260.5	1371.6	192.8
350	610	590.6	88.9	355.6	1374.8	1546.2	242.7
400	610	654.1	95.3	406.4	1498.6	1714.5	322.1
450	610	717.6	101.6	457.2	1657.4	1930.4	394.6
500	610	781.1	133.4	508.0	1759.0	2082.8	567.0
600	610	920.8	139.7	609.6	1984.4	2419.4	753.0

NOTE:

Dimensions are not certified and weights are estimates. Contact your sales representative for complete details.



PENTAIR VALVES & CONTROLS

www.pentair.com/valves

All Pentair trademarks and logos are owned by Pentair Ltd. All other brand or product names are trademarks or registered marks of their respective owners. Because we are continuously improving our products and services, Pentair reserves the right to change product designs and specifications without notice. Pentair is an equal opportunity employer. © 2012 Pentair Inc. All rights reserved.